



# Mega Bolt - Steel

## Round Head

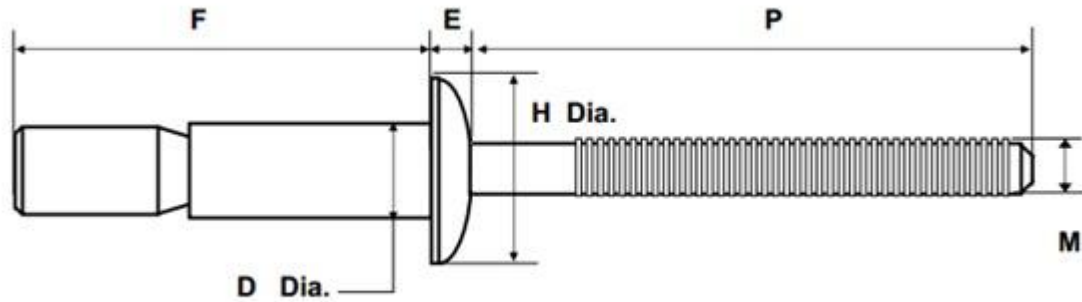

Part No.	Grip Range	Rivet Size	D Max	H Max	E Max	M Max	P Min	F Max	Hole Diam.	Typical Performance	
										Tensile	Shear
<b>MBSR-6-4</b>	1.63 - 6.86	4.80	4.88	10.10	2.30	3.00	27.00	18.20	4.9-5.2	4450 N	5785 N
<b>MBSR-6-7</b>	1.63 - 11.10	4.80	4.88	10.10	2.30	3.00	27.00	24.40	4.9-5.2	4450 N	5785 N
<b>MBSR-8-6</b>	2.03 - 9.53	6.40	6.58	13.33	3.00	4.10	27.00	23.70	6.6-7.0	8230 N	10675 N
<b>MBSR-8-10</b>	2.03 - 15.87	6.40	6.58	13.33	3.00	4.10	27.00	32.90	6.6-7.0	8230 N	10675 N

## Countersunk

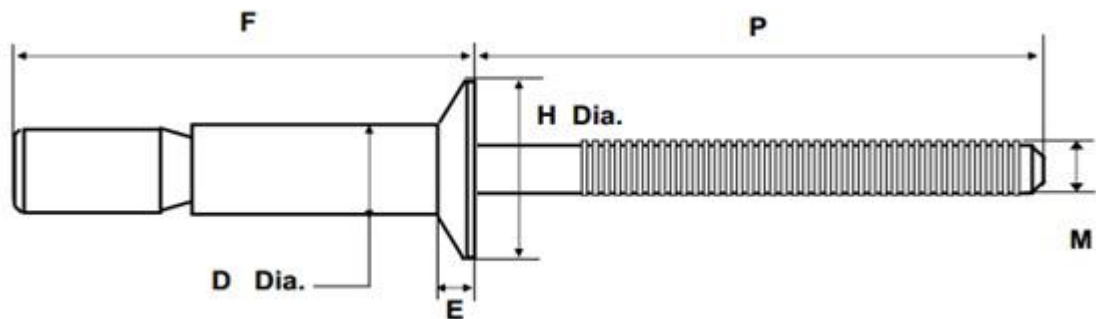

Part No.	Grip Range	Rivet Size	D Max	H Max	E Max	M Max	P Min	F Max	Hole Diam.	Typical Performance	
										Tensile	Shear
<b>MBSCSK-6-6</b>	3.2-8.4	4.80	4.88	8.50	2.20	3.00	27.00	20.00	4.9-5.2	4450 N	5785 N
<b>MBSCSK-6-9</b>	3.2-12.2	4.80	4.88	8.50	2.20	3.00	27.00	26.20	4.9-5.2	4450 N	5785 N
<b>MBSCSK-8-8</b>	3.2-12.1	6.40	6.58	10.60	2.40	4.10	27.00	26.30	6.6-7.0	8230 N	10675 N

Material	Body: Carbon Steel
	Mandrel: Carbon Steel
Surface	Body: Clear Zinc Plated
	Mandrel: Clear Zinc Plated