


# Mega Lock - Aluminium

## Technical Properties


Material - Body: Aluminium (A1Mg5.0), Mandrel: Aluminium 7A03    Surface - Body & Mandrel: Polished

### Round Head

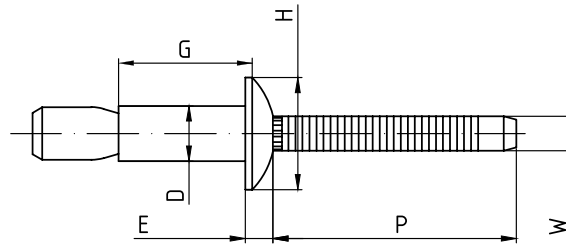

Part Number	Grip Range (mm)	D (Ø mm)	E (mm)	G (mm)	H (Ø mm)	P (mm)	W (Ø mm)	Tensile (N)	Shear (N)
MLAR-6-4	1.6 - 6.9	4.8 <sup>+0.08</sup> / <sub>-0.15</sub>	2.2 max	10 ±0.99	9.5 ±0.50	≥ 27	3.1 max	2000	2400
MLAR-6-E	1.6 - 11.0	4.8 <sup>+0.08</sup> / <sub>-0.15</sub>	2.2 max	14 ±0.99	9.5 ±0.50	≥ 27	3.1 max	2000	2400
MLAR-6-12	Available on request								
MLAR-8-6	2.0 - 9.5	6.5 <sup>+0.08</sup> / <sub>-0.15</sub>	3.0 max	14 ±0.99	12.7 ±0.50	≥ 28	4.1 max	3600	5600
MLAR-8-E	2.0 - 15.9	6.5 <sup>+0.08</sup> / <sub>-0.15</sub>	3.0 max	20 ±0.99	12.7 ±0.50	≥ 28	4.1 max	3600	5600
MLAR-12-10	Available on request								
MLAR-12-12	3.1 - 14.5	9.8 <sup>+0.08</sup> / <sub>-0.15</sub>	4.4 max	21.0 ±0.99	19.0 ±0.50	≥ 39	6.2 max	18500	13100
MLAR-12-18	Available on request								

### Countersunk Head

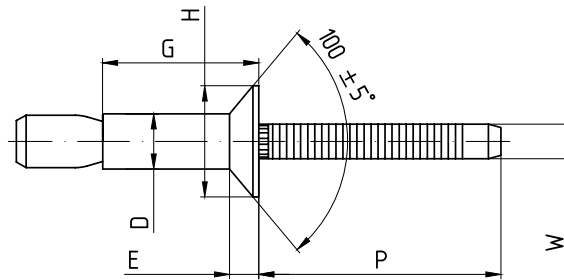

Part Number	Grip Range (mm)	D (Ø mm)	E (mm)	G (mm)	H (Ø mm)	P (mm)	W (Ø mm)	Tensile (N)	Shear (N)
MLACSK-6-6	3.2 - 8.4	4.8 <sup>+0.08</sup> / <sub>-0.15</sub>	1.8 ref	12 ±0.99	8.8 <sup>+0.00</sup> / <sub>-0.50</sub>	≥ 27	3.1 max	2000	2400
MLACSK-6-9	7.7 - 12.7	4.8 <sup>+0.08</sup> / <sub>-0.15</sub>	1.8 ref	16 ±0.99	8.8 <sup>+0.00</sup> / <sub>-0.50</sub>	≥ 27	3.1 max	2000	2400
MLACSK-8-8	4.1 - 12.1	6.5 <sup>+0.08</sup> / <sub>-0.15</sub>	2.0 ref	16 ±0.99	10.6 <sup>+0.00</sup> / <sub>-0.50</sub>	≥ 28	4.1 max	3600	5600
MLACSK-8-12	10.5 - 18.4	6.5 <sup>+0.08</sup> / <sub>-0.15</sub>	2.0 ref	22 ±0.99	10.6 <sup>+0.00</sup> / <sub>-0.50</sub>	≥ 28	4.1 max	3600	5600
MLACSK-12-12	Available on request								

External locking version available on request