


# Mega Lock - Aluminium

Round Head

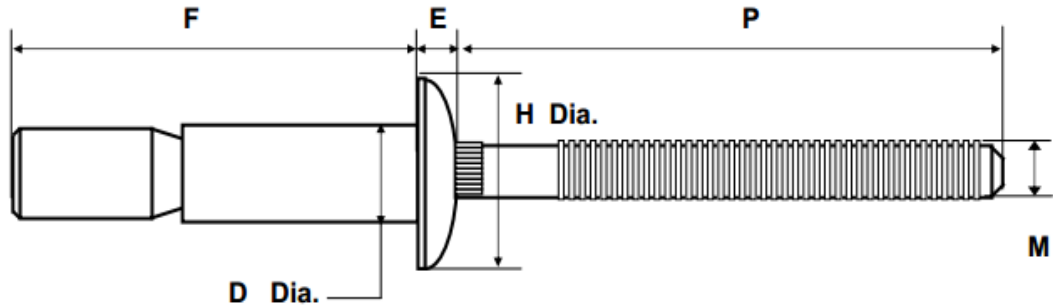

Part No.	Grip Range	Rivet Size	D Max	H Max	E Max	M Max	P Min	F Max	Hole Diam.	Typical Performance	
										Tensile	Shear
<b>MLAR-6-4</b>	1.6-6.9	4.80	4.88	10.20	2.40	3.10	27.00	21.40	4.9-5.1	2002 N	2446 N
<b>MLAR-6-7</b>	1.6-11.1	4.80	4.88	10.20	2.40	3.10	27.00	25.50	4.9-5.1	2002 N	2446 N
<b>MLAR-6-E</b>	1.6-11.1	4.80	4.88	10.20	2.40	3.10	27.00	25.50	4.9-5.1	2002 N	2446 N
<b>MLAR-8-6</b>	2.0-9.5	6.40	6.58	13.50	3.00	4.10	27.00	30.00	6.6-6.9	3692 N	5649 N
<b>MLAR-8-10</b>	2.0-15.9	6.40	6.58	13.50	3.00	4.10	27.00	35.60	6.6-6.9	3692 N	5649 N
<b>MLAR-8-E</b>	2.0-15.9	6.40	6.58	13.50	3.00	4.10	27.00	35.60	6.6-6.9	3692 N	5649 N

Material	Body: Aluminium
	Mandrel: Aluminium
Surface	Body: Polished
	Mandrel: Polished