


# Inspection Data

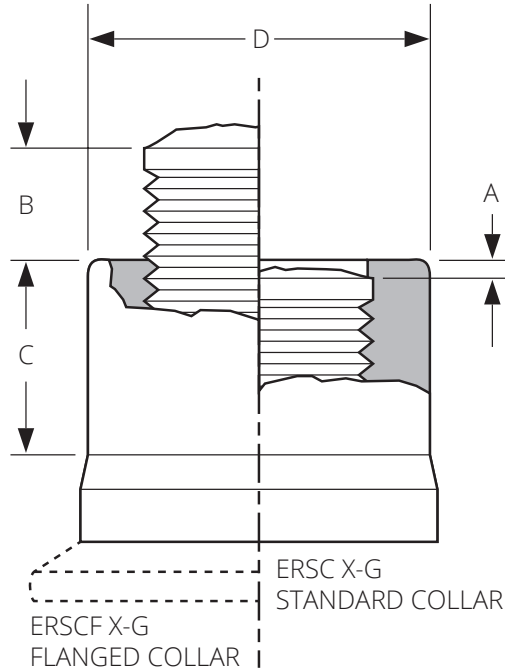

A properly installed Lock bolt fastener will possess the dimensional characteristics tabulated below. Should the dimensions 'A' or 'B' exceed the indicated values, the fastener is being used out-of-grip. A 'C' dimension less than the values specified is an indication of incomplete swage. A 'D' dimension exceeding the tabulated values is an indication of an incorrect or worn anvil on the installation tool.

Diameter	Pin Part No.	Collar Type		A Max	B Max	C Min	D Max
		STANDARD	FLANGED				
4.8mm (3/16")	ERSB 6-X	ERSC 06G	ERSCF 06G	1.98	3.18	4.37	7.01
6.4mm (1/4")	ERSB 8-X	ERSC 08G	ERSCF 08G	1.98	3.96	6.35	9.25
8.0mm (5/16")	ERSB 10-X	ERSC 10G	ERSCF 10G	3.56	5.56	7.14	11.53
9.6mm (3/8")	ERSB 12-X	ERSC 12G	ERSCF 12G	3.18	7.14	8.74	14.02