


ERSBMG06-XG - 4.8mm (3/16") Multi Grip Lock Bolt

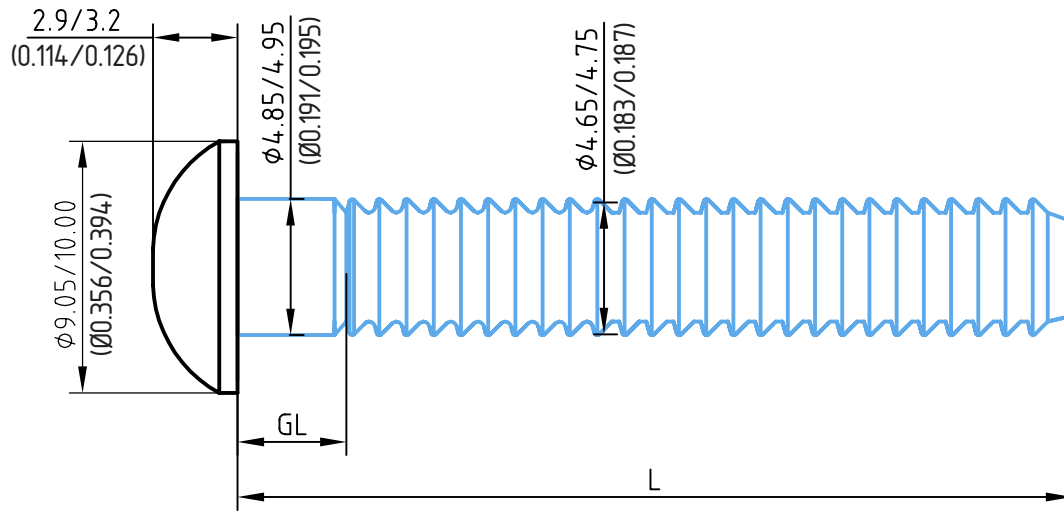

Technical Properties

Min Ultimate Tensile:	6.23 (KN)	Surface Treatment:	Cr3 +zinc clear
Clamping Load:	4.10 (KN)	Raw Material Specification:	Alloy steel
Min Shear Strength:	7.67 (KN)		

No	Part Number	Grip Range (mm)	Grip Range (inch)	GL (mm)	GL (Inch)	L (mm)	L (inch)
10	ERSBMG06-10G	1.57 - 15.88	0.062 - 0.625	2.62 - 3.18	0.103 - 0.125	45.42 - 46.06	1.788 - 1.813
20	ERSBMG06-20G	7.92 - 31.75	0.312 - 1.25	7.72 - 8.13	0.304 - 0.320	69.34 - 69.98	2.730 - 2.755