


ERSBMG08-XG - 6.4mm (1/4") Multi Grip Lock Bolt

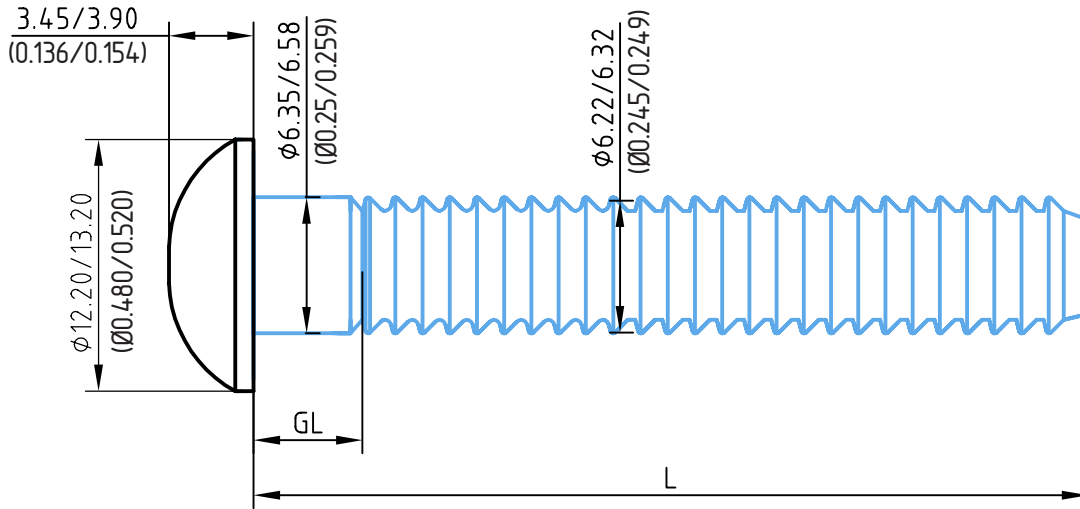

Technical Properties

Min Ultimate Tensile:	13.2 (KN)	Surface Treatment:	Cr3 +zinc clear
Clamping Load:	6 (KN)	Raw Material Specification:	Alloy steel
Min Shear Strength:	9.78 (KN)		

No	Part Number	Grip Range (mm)	Grip Range (inch)	GL (mm)	GL (Inch)	L (mm)	L (inch)
10	ERSBMG08-10G	1.57 - 15.88	0.062 - 0.625	2.78 - 3.58	0.109 - 0.141	49.91 - 51.82	1.965 - 2.040
20	ERSBMG08-20G	7.92 - 31.75	0.312 - 1.25	7.50 - 8.36	0.295 - 0.329	65.02 - 66.92	2.560 - 2.635