


ERSCSK20-XG-15.9mm(5/8") Countersunk Lock Bolt

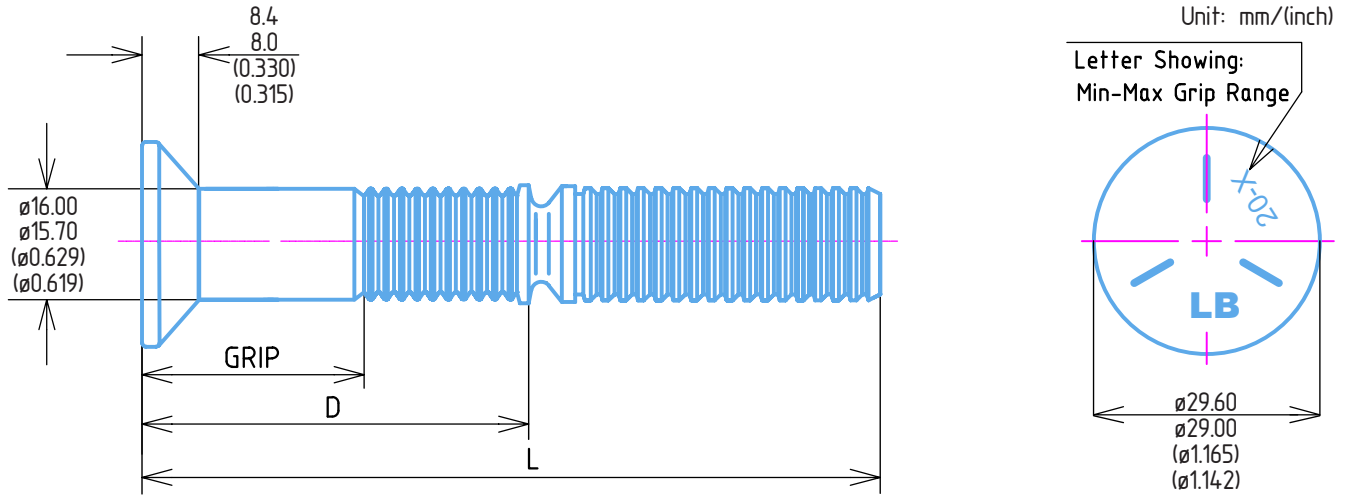

Technical Properties

Min Ultimate Tensile:	121 (KN)	Max Pin Protusion:	9.5 (mm)
Clamping Load:	85 (KN)	Max Pin Intrusion:	1.6 (mm)
Min Shear Strength:	100 (KN)	Surface Treatment:	10 µm Zinc Clear
Max Hole Diameter:	17.5 (mm)	Raw Material Specification:	Carbon Steel

5/8"	Part Number	Grip (mm)		Grip (inch)		D (mm)		D (inch)		L (mm)		L (inch)		Head Marking
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	
20-8	ERSCSK20-08G	12.7	19.05	0.5	0.75	42.2	43.2	1.67	1.7	97.7	102.2	3.85	4.02	20-8
20-12	ERSCSK20-12G	19.05	25.4	0.75	1	48.6	49.6	1.92	1.95	104.1	108.6	4.1	4.27	20-12
20-16	ERSCSK20-16G	25.4	31.75	1	1.25	54.9	55.9	2.17	2.2	110.4	114.9	4.35	4.52	20-16
20-20	ERSCSK20-20G	31.75	38.1	1.25	1.5	61.3	62.3	2.42	2.45	116.8	121.3	4.6	4.77	20-20
20-24	ERSCSK20-24G	38.1	44.45	1.5	1.75	67.6	68.6	2.67	2.7	123.1	127.6	4.85	5.02	20-24
20-28	ERSCSK20-28G	44.45	50.8	1.75	2	74	75	2.92	2.95	129.5	134	5.1	5.27	20-28
20-32	ERSCSK20-32G	50.8	57.15	2	2.25	80.3	81.3	3.17	3.2	135.8	140.3	5.35	5.52	20-32
20-36	ERSCSK20-36G	57.15	63.5	2.25	2.5	86.7	87.7	3.42	3.45	142.2	146.7	5.6	5.77	20-36
20-40	ERSCSK20-40G	63.5	69.85	2.5	2.75	93	94	3.67	3.7	148.5	153	5.85	6.02	20-40
20-44	ERSCSK20-44G	69.85	76.2	2.75	3	99.4	100.4	3.92	3.95	154.9	159.4	6.1	6.27	20-44
20-48	ERSCSK20-48G	76.2	82.55	3	3.25	105.7	106.7	4.17	4.2	161.2	165.7	6.35	6.52	20-48
20-52	ERSCSK20-52G	82.55	88.9	3.25	3.5	112.1	113.1	4.41	4.45	167.6	172.1	6.6	6.78	20-52
20-56	ERSCSK20-56G	88.9	95.25	3.5	3.75	118.4	119.4	4.66	4.7	173.9	178.4	6.85	7.02	20-56
20-60	ERSCSK20-60G	95.25	101.6	3.75	4	124.8	125.8	4.91	4.95	180.3	184.8	7.1	7.28	20-60
20-64	ERSCSK20-64G	101.6	107.95	4	4.25	131.1	132.1	5.16	5.2	186.6	191.1	7.35	7.52	20-64
20-68	ERSCSK20-68G	107.95	114.3	4.25	4.5	137.5	138.5	5.41	5.45	193	197.5	7.6	7.78	20-68
20-72	ERSCSK20-72G	114.3	120.65	4.5	4.75	143.8	144.8	5.66	5.7	199.3	203.8	7.85	8.02	20-72
20-76	ERSCSK20-76G	120.65	127	4.75	5	150.2	151.2	5.91	5.95	205.7	210.2	8.1	8.28	20-76