


# ERSSB 10-X - 8mm (5/16") Round Head Lock Bolt

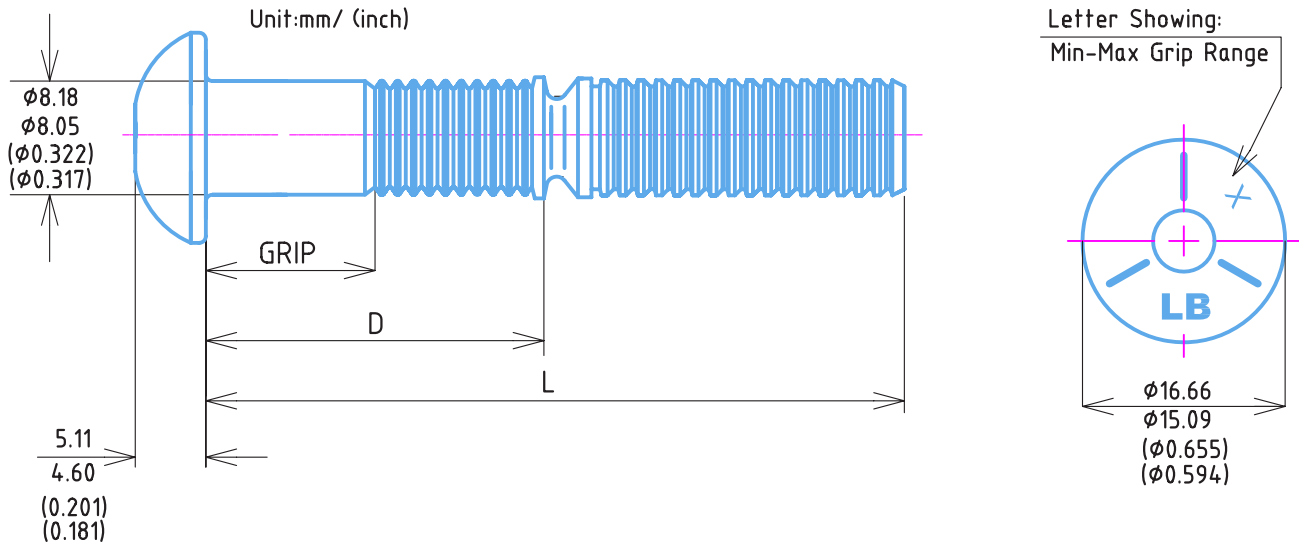

## Technical Requirements

Min Ultimate Tensile:	18.9 (KN)	Clamping Load:	12.5 (KN)
Min Shear Strength:	24.5 (KN)	Surface Treatment:	SS304
Max Hole Diameter:	8.2 (mm)	Raw Material Specification:	Bright

5/16"	Part Number	Grip (mm)		Grip (inch)		D (mm)		D (inch)		L (mm)		L (inch)		Head Marking
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	
10-4	ERSSB10-04	3.18	9.53	0.125	0.375	18.22	19.82	0.717	0.78	48.51	50.01	1.91	1.969	4
10-6	ERSSB10-06	6.35	12.7	0.25	0.5	21.4	23	0.843	0.906	51.69	53.19	2.035	2.094	6
10-8	ERSSB10-08	9.53	15.88	0.375	0.625	24.57	26.17	0.967	1.03	54.86	56.36	2.16	2.219	8
10-10	ERSSB10-10	12.7	19.05	0.5	0.75	27.75	29.35	1.093	1.156	58.04	59.54	2.285	2.344	10
10-12	ERSSB10-12	15.88	22.23	0.625	0.875	30.92	32.52	1.217	1.28	61.21	62.71	2.41	2.469	12
10-14	ERSSB10-14	19.05	25.4	0.75	1	34.1	35.7	1.343	1.406	64.39	65.89	2.535	2.594	14
10-16	ERSSB10-16	22.23	28.58	0.875	1.125	37.27	38.87	1.467	1.53	67.56	69.06	2.66	2.719	16
10-18	ERSSB10-18	25.4	31.75	1	1.25	40.45	42.05	1.593	1.656	70.74	72.24	2.785	2.844	18
10-20	ERSSB10-20	28.58	34.93	1.125	1.375	43.62	45.22	1.717	1.78	73.91	75.41	2.91	2.969	20