


ERSSB 24-X - 19.1mm (3/4") Round Head Lock Bolt

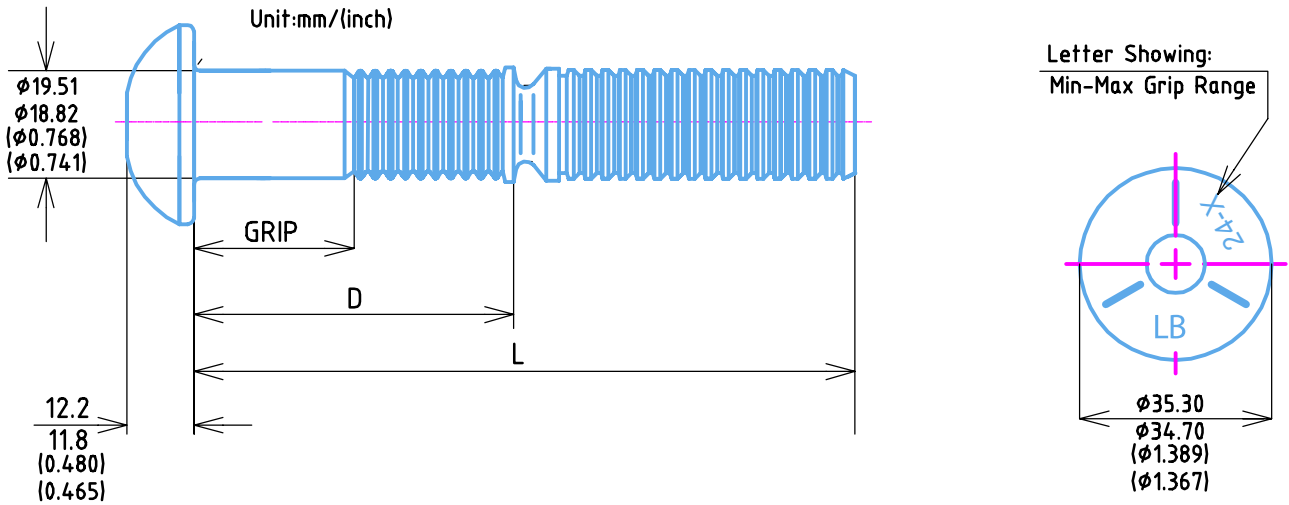

Technical Requirements

Min Ultimate Tensile:	178.2 (KN)	Max Pin Protusion:	9.5 (mm)
Clamping Load:	126.2 (KN)	Max Pin Intrusion:	1.6 (mm)
Min Shear Strength:	134.7 (KN)	Surface Treatment:	SS304
Max Hole Diameter:	20.5 (mm)	Raw Material Specification:	Bright

3/4"	Part Number	Grip (mm)		Grip (inch)		D (mm)		D (inch)		L (mm)		L (inch)		Head Marking
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	
24-4	ERSSB24-04	6.35	12.7	0.25	0.5	38.1	39.1	1.5	1.53	104.1	108.6	4.1	4.27	24-4
24-8	ERSSB24-08	12.7	19.05	0.5	0.75	44.4	45.4	1.75	1.78	110.4	114.9	4.35	4.52	24-8
24-12	ERSSB24-12	19.05	25.4	0.75	1	50.8	51.8	2	2.03	116.8	121.3	4.6	4.77	24-12
24-16	ERSSB24-16	25.4	31.75	1	1.25	57.1	58.1	2.25	2.28	123.1	127.6	4.85	5.02	24-16
24-20	ERSSB24-20	31.75	38.1	1.25	1.5	63.5	64.5	2.5	2.53	129.5	134	5.1	5.27	24-20
24-24	ERSSB24-24	38.1	44.45	1.5	1.75	69.8	70.8	2.75	2.78	135.8	140.3	5.35	5.52	24-24
24-28	ERSSB24-28	44.45	50.8	1.75	2	76.2	77.2	3	3.03	142.2	146.7	5.6	5.77	24-28
24-32	ERSSB24-32	50.8	57.15	2	2.25	82.5	83.5	3.25	3.28	148.5	153	5.85	6.02	24-32
24-36	ERSSB24-36	57.15	63.5	2.25	2.5	88.9	89.9	3.5	3.53	154.9	159.4	6.1	6.27	24-36
24-40	ERSSB24-40	63.5	69.85	2.5	2.75	95.2	96.2	3.75	3.78	161.2	165.7	6.35	6.52	24-40
24-44	ERSSB24-44	69.85	76.2	2.75	3	101.6	102.6	4	4.03	167.6	172.1	6.6	6.77	24-44
24-48	ERSSB24-48	76.2	82.55	3	3.25	107.9	108.9	4.25	4.28	173.9	178.4	6.85	7.02	24-48