



Mega Bolt - Stainless Steel

Round Head

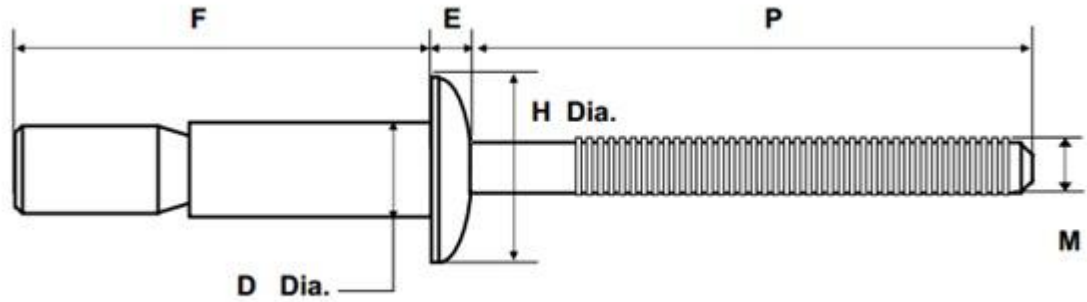

Part No.	Grip Range	Rivet Size	D Max	H Max	E Max	M Max	P Min	F Max	Hole Diam.	Typical Performance	
										Tensile	Shear
MBSSR-6-4	1.60 - 6.50	4.80	4.89	9.79	2.20	3.05	27.00	18.20	5.0-5.2	5100 N	6400 N
MBSSR-6-7	1.60 - 11.0	4.80	4.89	9.79	2.20	3.05	27.00	24.40	5.0-5.2	5100 N	6400 N
MBSSR-8-6	2.00 - 9.50	6.40	6.51	13.35	3.00	4.11	27.00	26.70	6.7-6.9	9000 N	11000 N
MBSSR-8-10	2.00 - 16.0	6.40	6.51	13.50	3.00	4.11	27.00	36.50	6.7-6.9	9000 N	11000 N

Countersunk

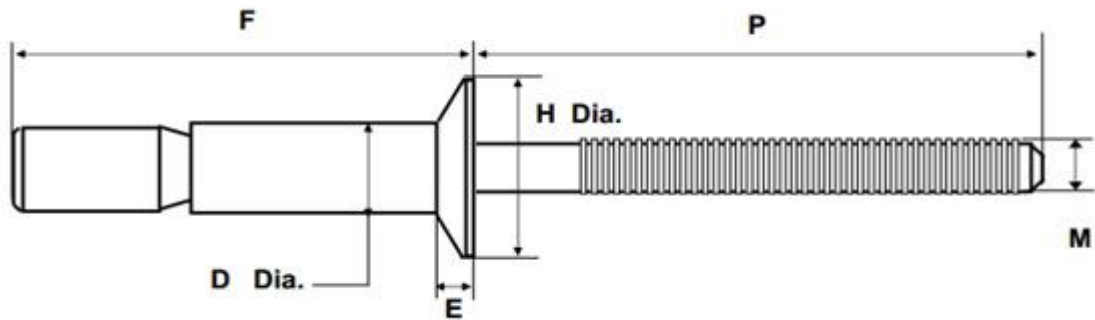

Part No.	Grip Range	Rivet Size	D Max	H Max	E Max	M Max	P Min	F Max	Hole Diam.	Typical Performance	
										Tensile	Shear
MBSSCSK-8-8	4.10 - 12.10	6.40	6.51	10.35	2.40	4.11	27.00	28.30	6.7-6.9	9000 N	11000 N

Material	Body: Stainless Steel
	Mandrel: Stainless Steel
Surface	Body: Polished
	Mandrel: Polished